


## CC6100 Series

# Coin Changer

- High performance coin management system
- Easily configurable payout system with modular tube design
- Advanced anti-counterfeiting technology
- Six circulating coin tubes for a higher coin capacity and lower restocking frequency
- Power saving function (CC6100SA)
- IrDA firmware upgrade available (CC6100SA/ CC6100E)
- Support EVA-DTS auditing format (CC6100SA/ CC6100E)

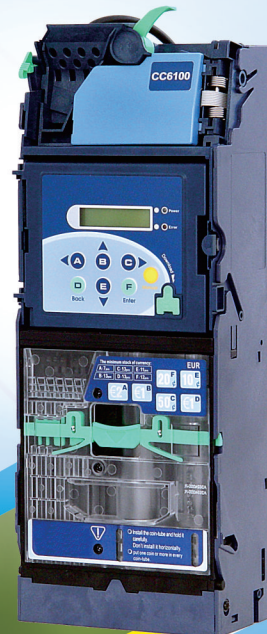

# CC6100 Series

## Coin Changer

The CC6100 Series features six modular coin tubes to provide the highest level of flexibility in managing payout combinations. With MDB, JPSTD and Executive/ MDB interfaces available, the CC6100 Series supports multiple and outdoor applications.

### Specifications



#### Acceptance Rate

96% or greater



#### Coin Accepted

Diameter: 16~28 mm/0.63~1.10 inches  
Thickness: 1.2~2.5 mm/0.05~0.98 inches



#### Acceptance Speed

Approx. 2 coins/1.5 sec.



#### Dispensing Speed

Approx. 1 coins/sec.



#### Escrow <Optional>

2 channels, 2 coins/channel



#### Number of tubes

6



#### Interface

MDB, JPSTD, Executive/MDB



#### Power Source

MDB: 20V~45V DC  
10V~16V DC (CC6100S)  
JPSTD: 24V DC±10%  
Executive: 24V AC±10%



#### Power Consumption

Operation: <650mA, 15.6W (24V DC)  
Standby: <150mA, 3.6 W (24V DC)  
Power Saving: <10µA, 0.1 W~0.16W



#### Dimension

369.6 x 138 x 81 mm/  
14.55 x 5.43 x 3.18 inches



#### Weight

Approx. 2.05 kg/4.4 lbs



#### Environmental

Operating Temperature:  
-15°C/5°F~60°C/140°F  
Storage Temperature:  
-30°C/-22°F~80°C/176°F  
Humidity: 30% ~ 85%RH  
(no condensation)



#### Recommended Applications

Indoor/Outdoor Vending, Kiosk



© Please refer to ICT website ([www.ictgroup.com.tw](http://www.ictgroup.com.tw)) for tube assignment.

© JPSTD stands for Japan standard communication interface.

Specifications are subject to change without prior notice.



### International Currency Technologies

No.28, Ln. 15, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City 114, Taiwan

Phone: +886-2-2793-1236

Fax: +886-2-2793-6125

Email: [sales@ictgroup.com.tw](mailto:sales@ictgroup.com.tw) (Product Information)

[fae@ictgroup.com.tw](mailto:fae@ictgroup.com.tw) (Technical Service)

Website: [www.ictgroup.com.tw](http://www.ictgroup.com.tw)